

Pedestrian & Site Lighting Collection



Luminaires

4 sizes | 2 & 4 strut

Bollards

3 body styles

Post arms

3 styles

Wall mounts

3 styles

LED technology
powered by Nichia® & Cree®

***ANP* Lighting**
INNOVATIVE SITE LIGHTING



Available in 4 sizes



LA2231



LA2331



LA2201 | LA2211 | LA2221 | LA2231
16w | 24w | 37w | 46w | 78w | 117w
4-strut, post and wall mount



LA2301 | LA2311 | LA2321 | LA2331
16w | 24w | 37w | 46w | 78w | 117w
2-strut, post and wall mount

Bold, streamlined architectural lighting collection with high-performance LED technology powered by Nichia® and Cree®

With its stunning profile for pedestrian and site lighting, the 220/230 collection offers three size options to create a seamless transition from parking lots to walkways and facades. The 220/230 collection is manufactured from durable, high-quality cast and spun aluminum. The collection is available in both two and four struts with post arms and wall mounts in three styles and coordinating bollards in three body styles.

Adding to the bold styling, energy-efficient, high-performance lighting is achieved with multiple LED offerings:

46w/78w/117w high performance LED platforms | 16w/24w/37w cost effective LED modules | 2700K, 3000K, 3500K, 4000K & 5000K (CCT may vary by light engine.)


Complementing style, performance, and meeting the demands of lighting control ordinances and specifications is made simpler with industry standard Triac, 0-10v, DMX and DALI dimming options.



LA220 | LA230 Series Post and wall mount available in four sizes with 2- or 4-struts

Build A Product

LUMINAIRES	
LA22	4-strut
LA23	2-strut
SIZE	
0	11-1/2" H x 10-3/4" W
1	15-3/8" H x 14-1/4" W
2	20-1/2" H x 18-3/4" W
3	23" H x 21-1/4" W
ORIENTATION	
1	Post
WATTAGE	
M016LD	16-watt Cree® LED module
M024LD	24-watt Cree LED module (Size 1, 2 and 3 only)
M037LD	37-watt Cree LED module (Size 1, 2 and 3 only)
P046LD4	46-watt platform (Size 1, 2 and 3 only)
P078LD4	78-watt platform (Size 2 and 3 only)
P117LD4	117-watt platform (Size 3 only)
DIMMING	
D	Dimming (0-10v)
N	No Dimming
OPTICS	
T2	Type II
T3	Type III
T5	Type V (M016, M024, M037 are T5 only)
COLOR TEMPERATURE (CCT)	
27K	2700K
30K	3000K (M016, M024, M037 only)
35K	3500K
40K	4000K
50K	5000K (P046, P078, P117 only)
ACCESSORIES	
PC	Photo cell
TLPC	Twist lock photo cell
FINISH	
	Visit anplighting.com/products/color-finishes

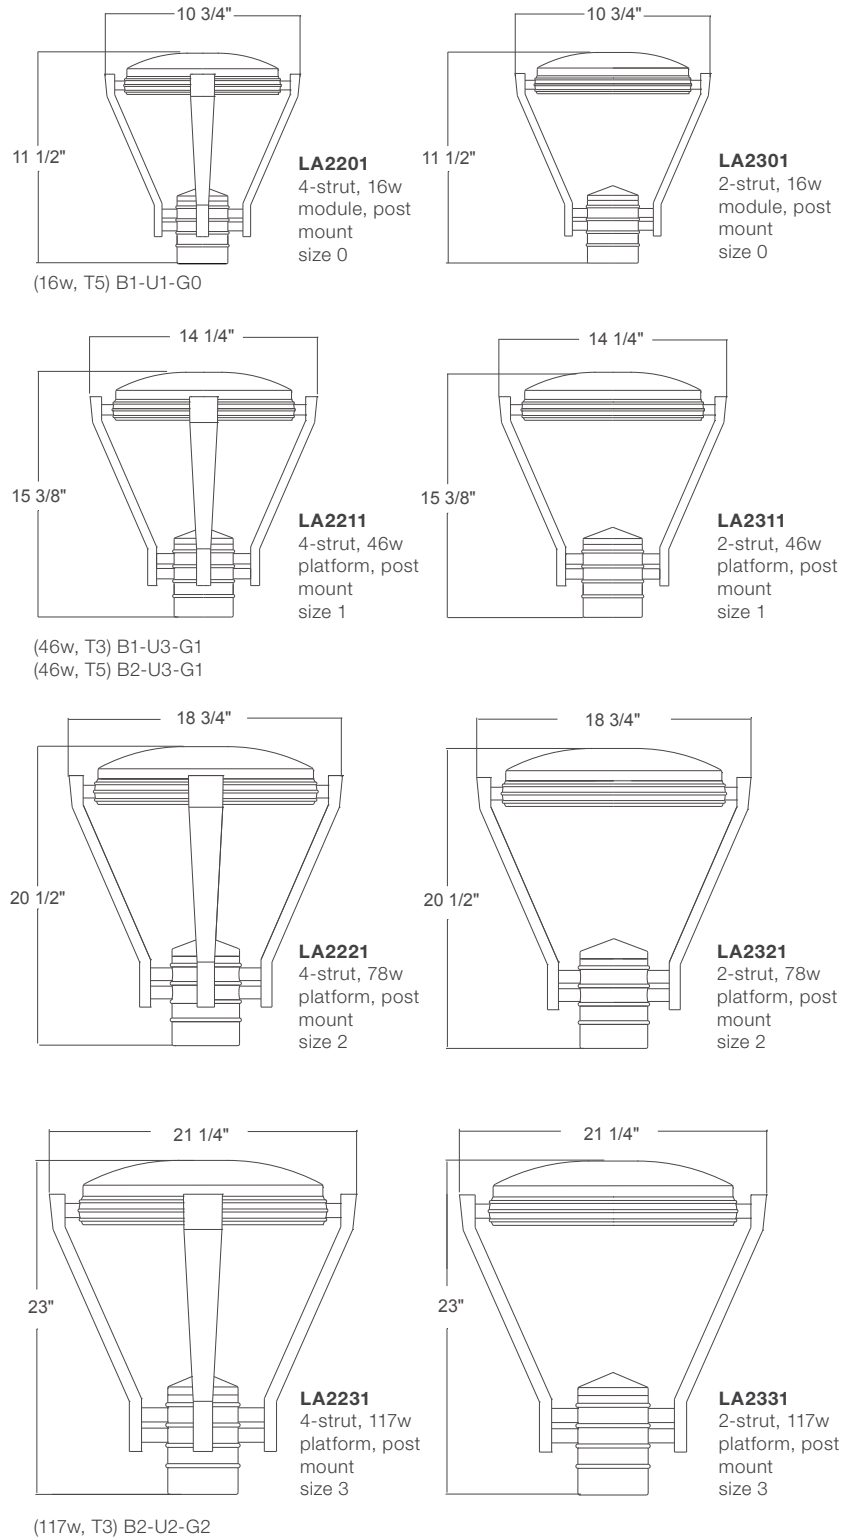

Product Number Sample




LUMINAIRE	SIZE	ORIENTATION	WATTAGE	DIMMING	OPTICS	COLOR TEMP	ACCESSORY	FINISH
LA 22	2	1	P078LD4	N	T5	40K	PC	13




Post arms

220 | 230 Series

Available in 3 styles

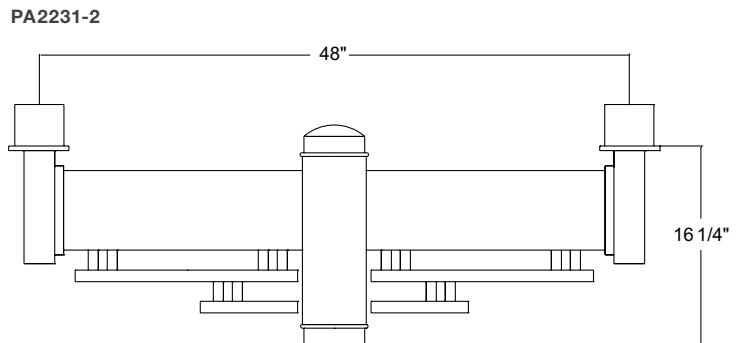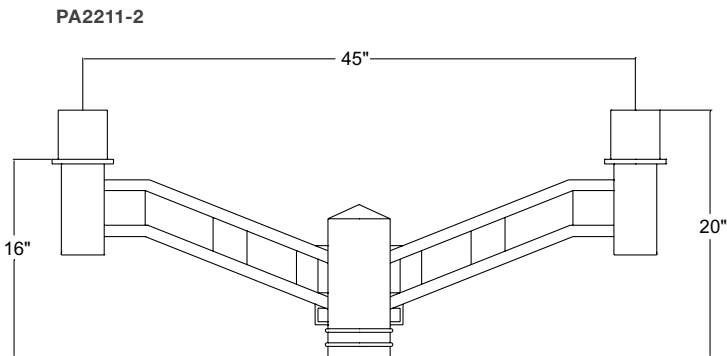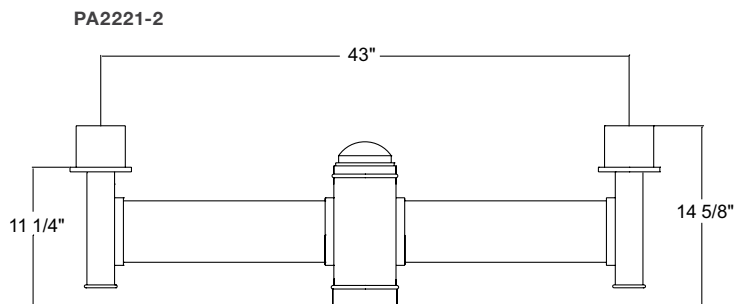



Available in 3 styles



WM2211-LA2311





WM2221-LA2211





WM2231-LA2311



WM2221

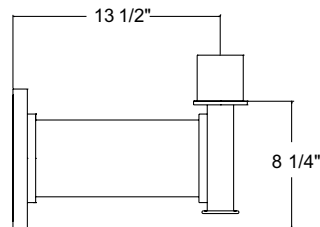

WM2211

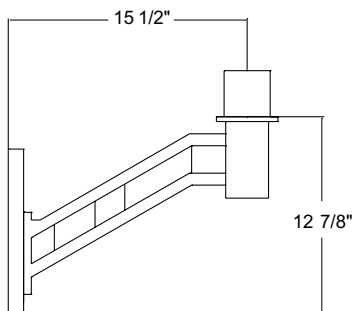

WM2231

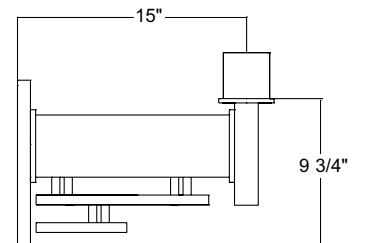



Bollards

220 | 230 Series

Available in 3 body styles



BL2201

BL2202

BL2203

BL2301

BL2302

BL2303



4-strut, 16w Cree module




2-strut, 16w Cree module


BL220 | BL230 Series

Build A Product


BOLLARDS	
BL2201	4-strut
BL2202	4-strut
BL2203	4-strut
BL2301	2-strut
BL2302	2-strut
BL2303	2-strut
LENS	
NL	No Lens
WATTAGE	
M010LD	10-watt Cree LED module
M016LD	16-watt Cree LED module
DIMMING	
D	Dimming (10-watt is TRIAC, 120v only, 16-watt is 0-10v)
N	No Dimming
OPTICS	
T5	Type V
COLOR TEMPERATURE (CCT)	
27K	2700K
30K	3000K
35K	3500K
40K	4000K
ACCESSORIES	
IBOLT	Eye Bolt
FINISH	
Visit anplighting.com/products/color-finishes	

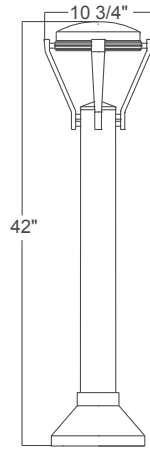


BL2201
4-strut

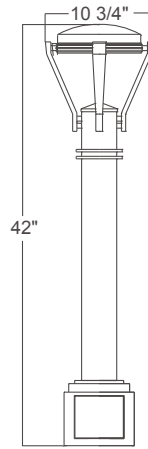


BL2202
4-strut

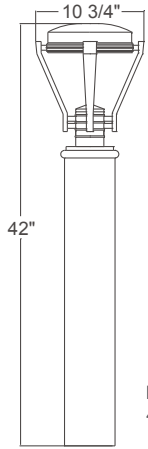


BL2203
4-strut

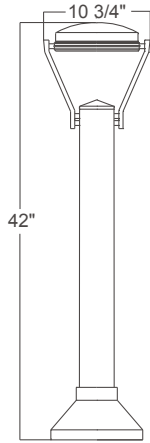

BL2301
2-strut

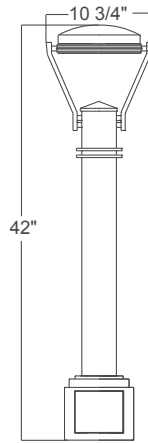

BL2302
2-strut

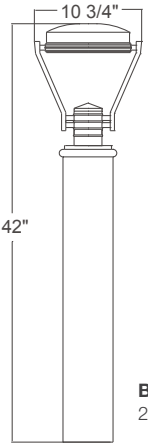

BL2303
2-strut





Product Number Sample

BOLLARD	LENS	WATTAGE	DIMMING	OPTICS	COLOR TEMP	ACCESSORY	FINISH
BL2201	NL	M016LD	N	T5	40K		41



Illuminating
ENGINEERING SOCIETY

PHOTOMETRICS

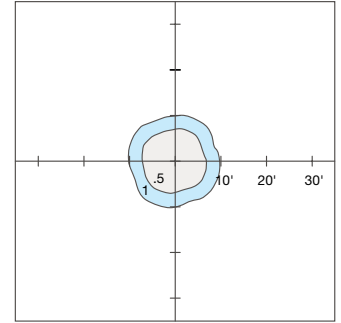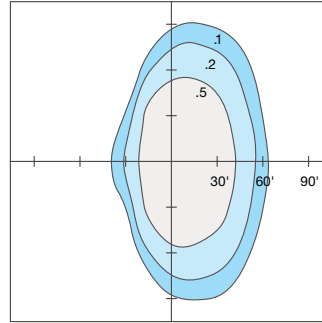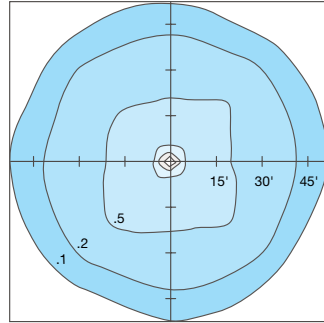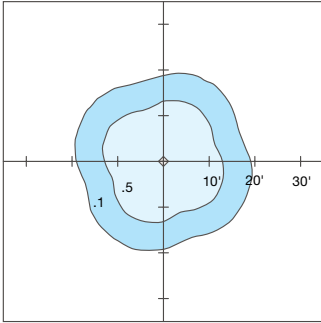

LA2201-M016LD-N-T5-40K
 Fixture lumens - 988
 Mounting height - 10.0 ft.
 B1-U1-G0



LA2211-P046LD4-T5-35K
 Fixture lumens - 3663
 Mounting height - 16.0 ft.
 B2-U3-G1



LA2231-P117LD4-T3-40K
 Fixture lumens - 10375
 Mounting height - 25.0 ft.
 B2-U2-G2



BL2201-M016LD-N-T5-40K
 Fixture lumens - 988
 Mounting height - 3.5 ft.
 B1-U1-G0

MLO & BUG Rating Guide

The Model Lighting Ordinance (MLO) is a guide for environmentally responsible outdoor lighting in North America and is the result of extensive efforts by the International Dark Sky Association (IDA) and the Illuminating Engineering Society of North America (IESNA).

For a BUG Rating Quick Reference Guide, visit www.ANPLighting.com and click the Resource tab.

Since 1985, ANP Lighting has been skillfully integrating design aesthetics, engineering excellence, and advancing technology to manufacture the industry's only all-LED line of decorative architectural lighting and warehouse-inspired RLM fixtures. With our privately owned foundry and spinning facilities and in-house engineering department, we can quickly and cost-effectively modify any product to deliver an affordable custom modification solution. We empower architects, engineers, and specifiers to meet the growing demand for energy conservation, sustainability, and environmental design inspiration.

We design and manufacture the largest selection of LED decorative architectural lighting available today, including luminaires, bases, poles, and bollards, and are recognized as the #1 manufacturer of RLM fixtures and mountings in the industry.



Contact Us: 800-548-3227 | 909-982-1807
ANPLighting.com

9044 Del Mar Avenue, Montclair, CA 91763



WM2211-LA2301

PA2211-2-LA2231

BL2301