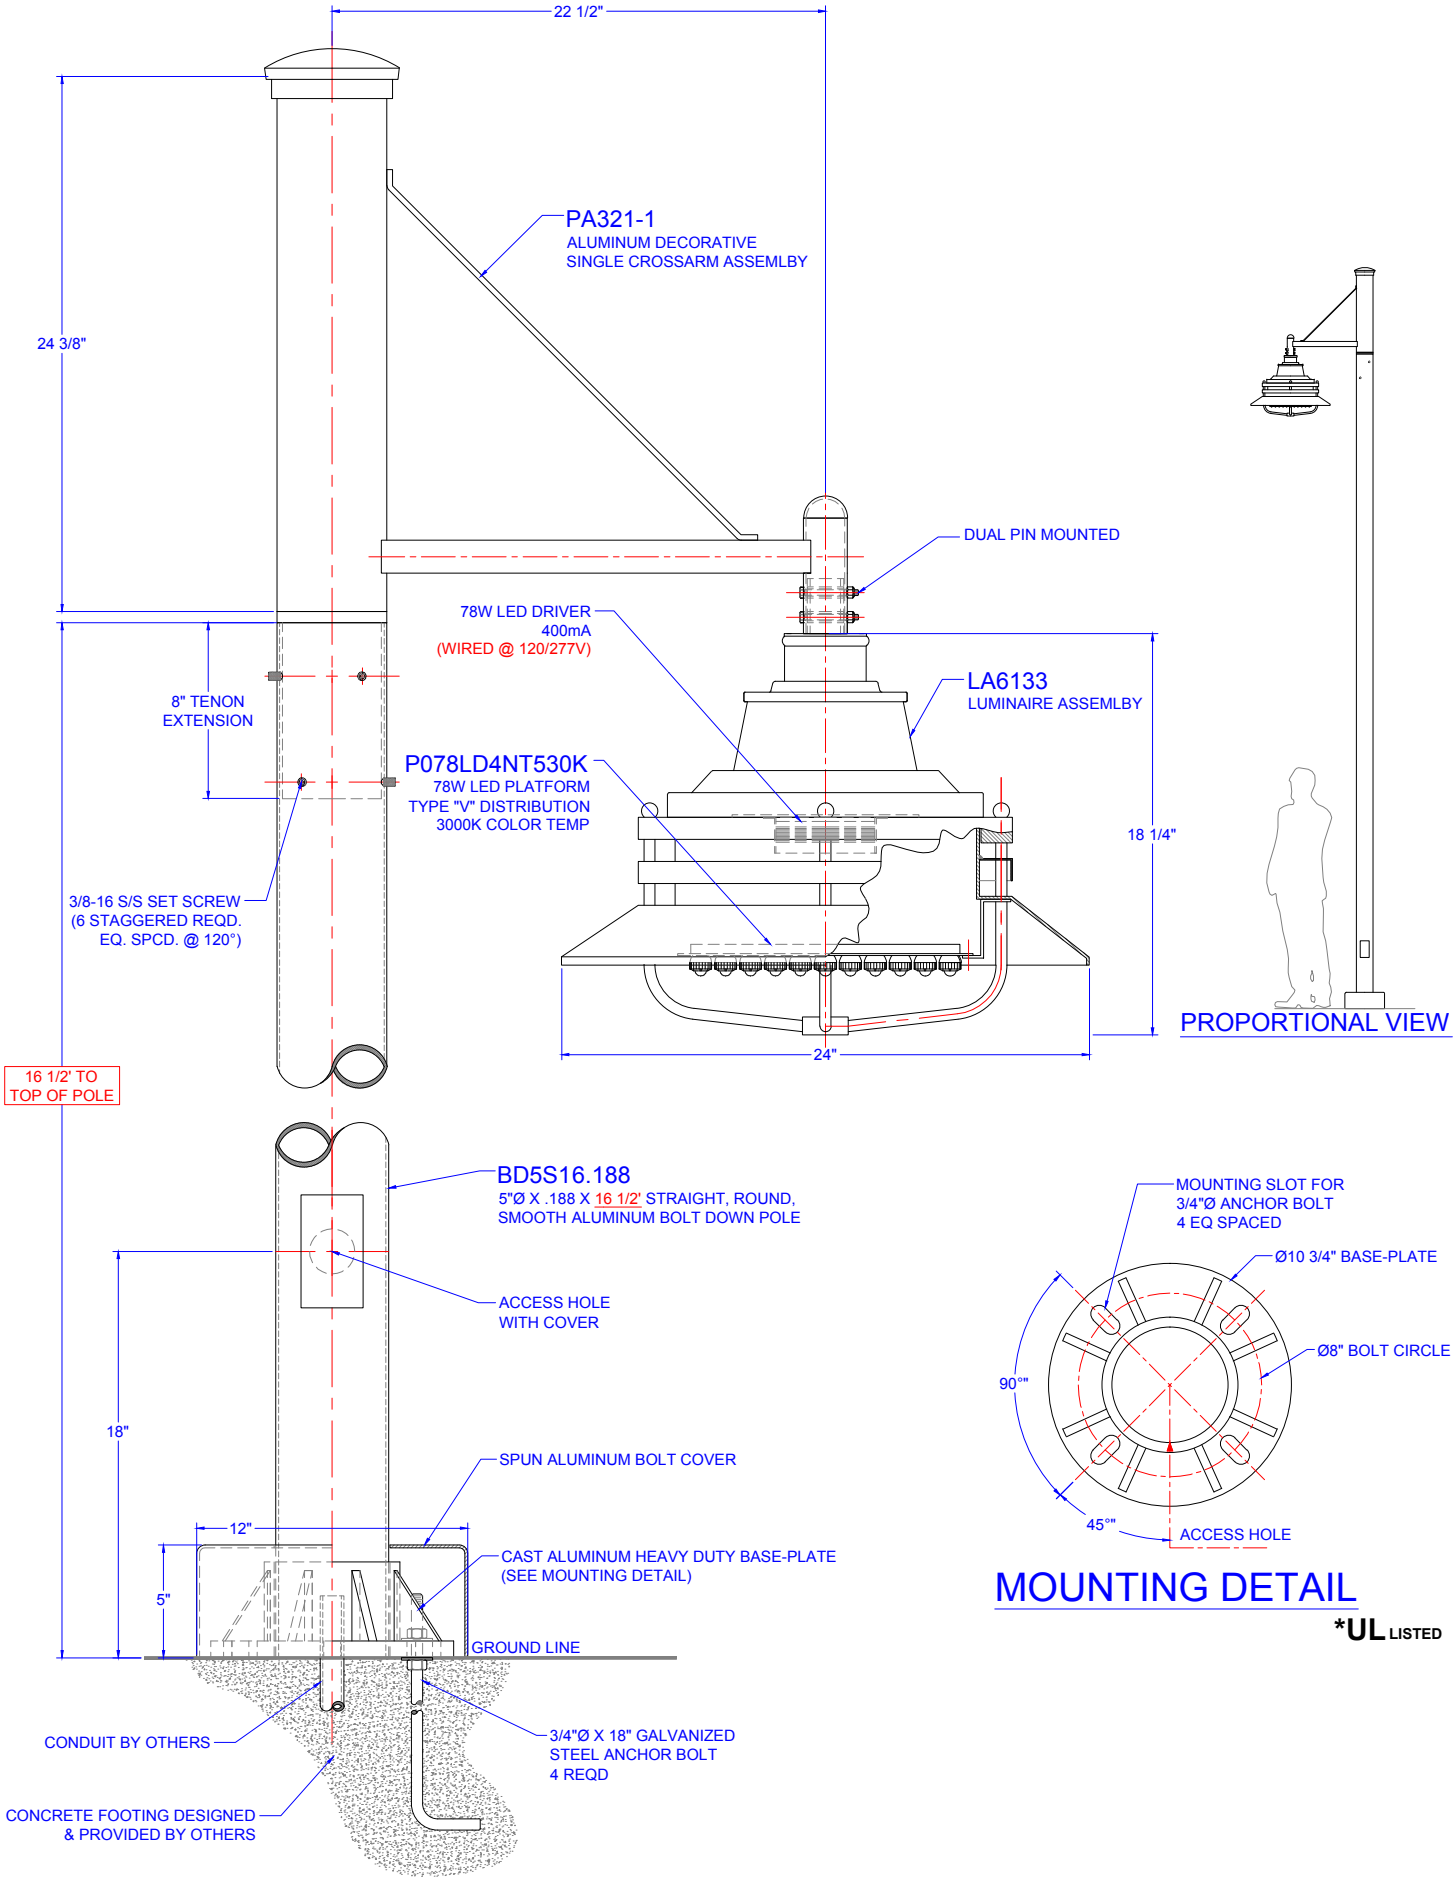
22 1/2"
PA321-1
ALUMINUM DECORATIVE
SINGLE CROSSARM ASSEMLBY
24 3/8"
DUAL PIN MOUNTED
78W LED DRIVER
400mA
(WIRED @ 120/277V)
LA6133
LUMINAIRE ASSEMLBY
8" TENON
EXTENSION
P078LD4NT530K
78W LED PLATFORM
TYPE "V" DISTRIBUTION
3000K COLOR TEMP
18 1/4"
3/8-16 S/S SET SCREW
(6 STAGGERED REQD.
EQ. SPCD. @ 120°)
24"
PROPORTIONAL VIEW
16 1/2' TO
TOP OF POLE
BD5S16.188
5"Ø X .188 X 16 1/2' STRAIGHT, ROUND,
SMOOTH ALUMINUM BOLT DOWN POLE
ACCESS HOLE
WITH COVER
18"
SPUN ALUMINUM BOLT COVER
12"
CAST ALUMINUM HEAVY DUTY BASE-PLATE
(SEE MOUNTING DETAIL)
5"
GROUND LINE
CONDUIT BY OTHERS
3/4"Ø X 18" GALVANIZED
STEEL ANCHOR BOLT
4 REQD
CONCRETE FOOTING DESIGNED
& PROVIDED BY OTHERS
MOUNTING SLOT FOR
3/4"Ø ANCHOR BOLT
4 EQ SPACED
Ø10 3/4" BASE-PLATE
Ø8" BOLT CIRCLE
90°"
45°"
ACCESS HOLE
MOUNTING DETAIL
*UL LISTED