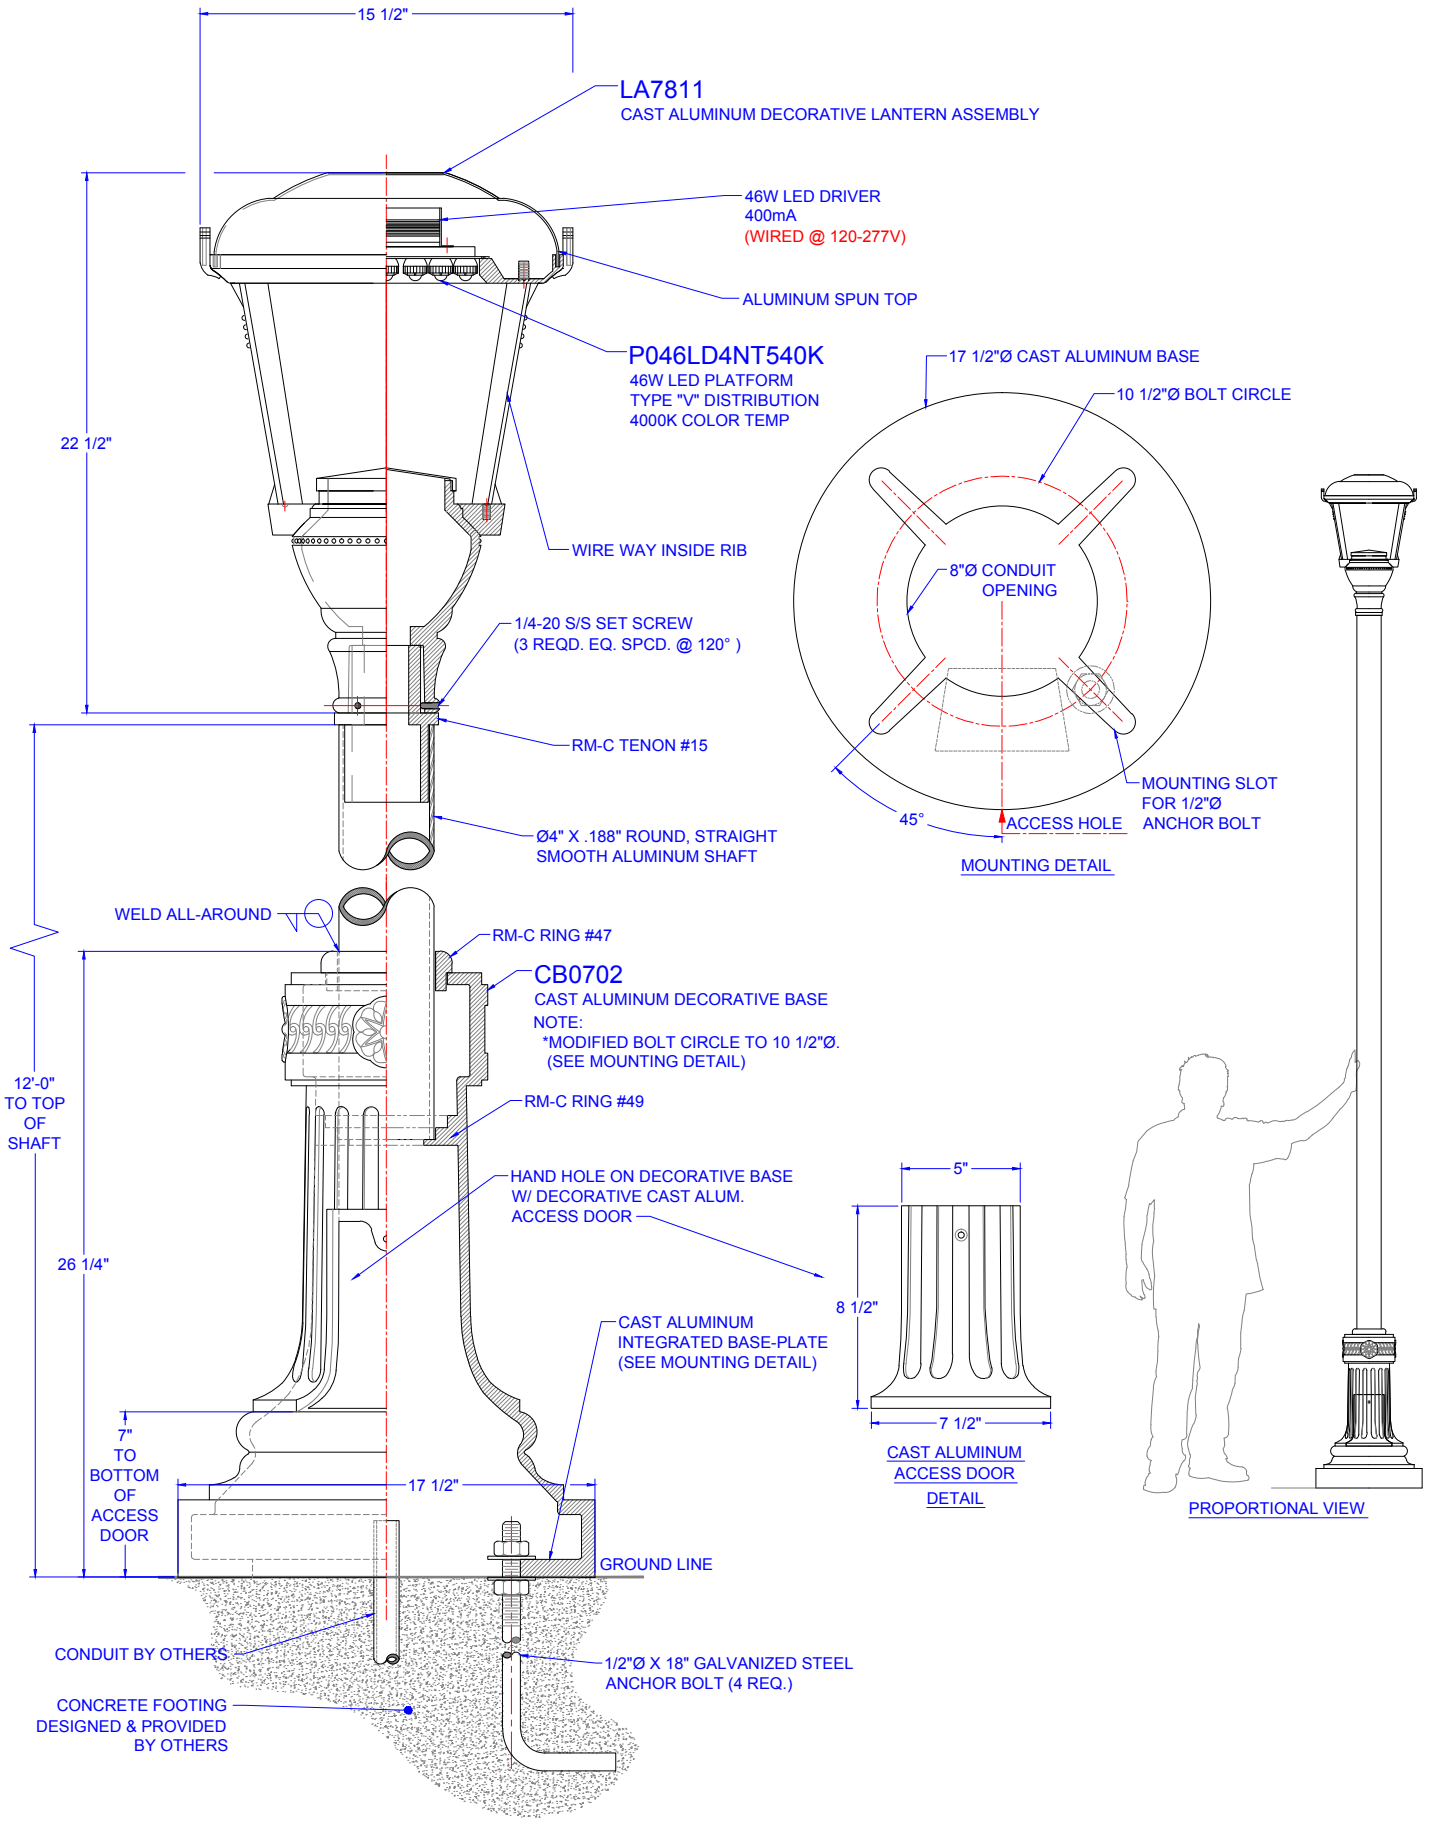
15 1/2"
LA7811
CAST ALUMINUM DECORATIVE LANTERN ASSEMBLY
46W LED DRIVER
400mA
(WIRED @ 120-277V)
ALUMINUM SPUN TOP
P046LD4NT540K
46W LED PLATFORM
TYPE "V" DISTRIBUTION
4000K COLOR TEMP
22 1/2"
WIRE WAY INSIDE RIB
1/4-20 S/S SET SCREW
(3 REQD. EQ. SPCD. @ 120°)
RM-C TENON #15
Ø4" X .188" ROUND, STRAIGHT
SMOOTH ALUMINUM SHAFT
WELD ALL-AROUND
RM-C RING #47
CB0702
CAST ALUMINUM DECORATIVE BASE
NOTE:
*MODIFIED BOLT CIRCLE TO 10 1/2"Ø.
(SEE MOUNTING DETAIL)
12'-0"
TO TOP
OF
SHAFT
RM-C RING #49
HAND HOLE ON DECORATIVE BASE
W/ DECORATIVE CAST ALUM.
ACCESS DOOR
26 1/4"
CAST ALUMINUM
INTEGRATED BASE-PLATE
(SEE MOUNTING DETAIL)
7"
TO
BOTTOM
OF
ACCESS
DOOR
17 1/2"
GROUND LINE
CONDUIT BY OTHERS
1/2"Ø X 18" GALVANIZED STEEL
ANCHOR BOLT (4 REQ.)
CONCRETE FOOTING
DESIGNED & PROVIDED
BY OTHERS
17 1/2"Ø CAST ALUMINUM BASE
10 1/2"Ø BOLT CIRCLE
8"Ø CONDUIT
OPENING
MOUNTING SLOT
FOR 1/2"Ø
ANCHOR BOLT
45°
ACCESS HOLE
MOUNTING DETAIL
5"
8 1/2"
7 1/2"
CAST ALUMINUM
ACCESS DOOR
DETAIL
PROPORTIONAL VIEW