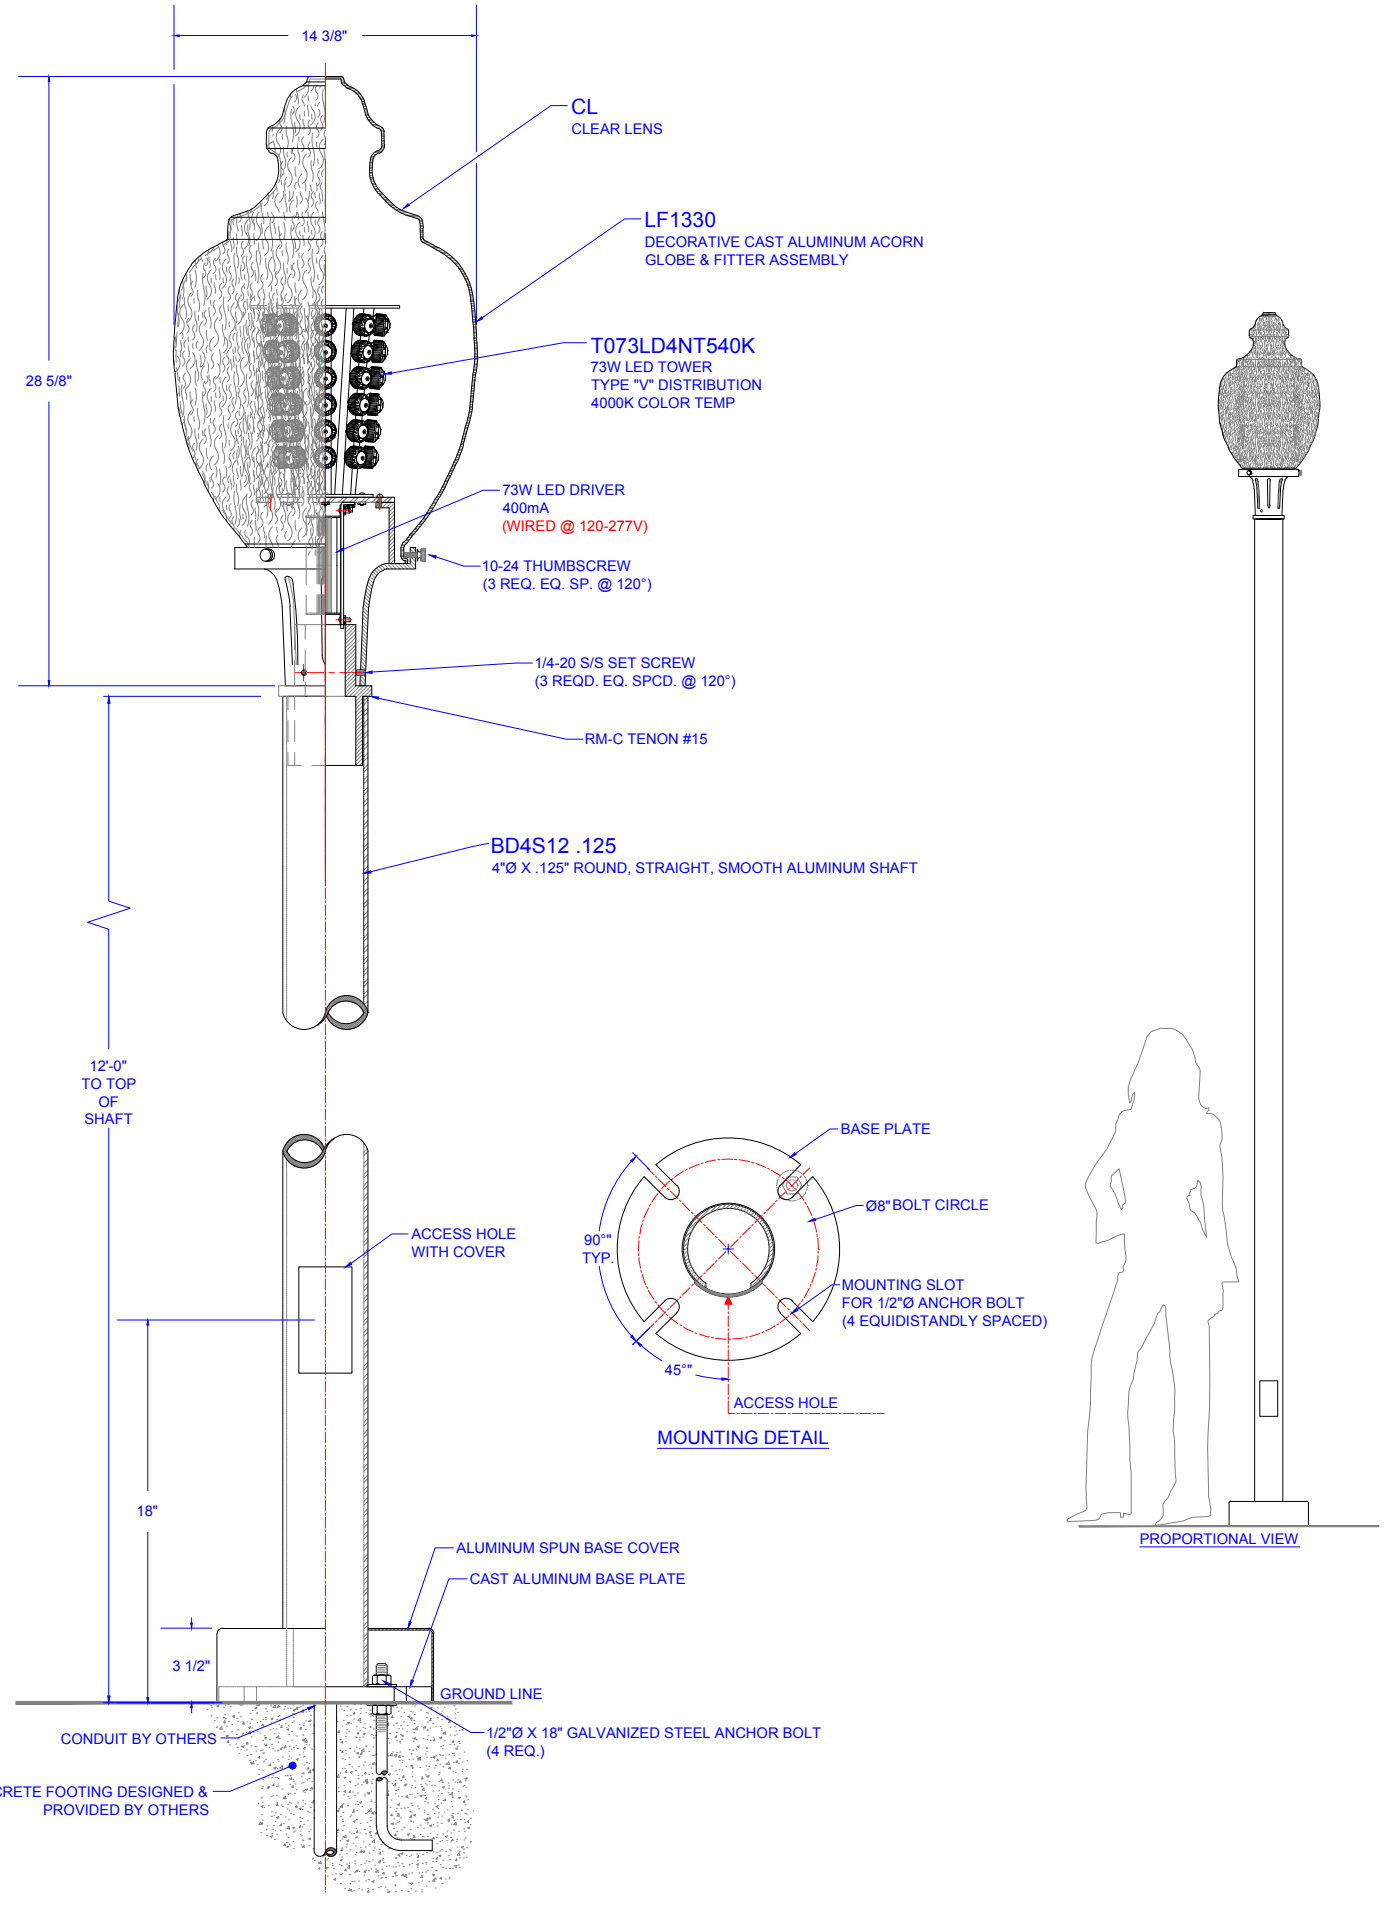
14 3/8"
28 5/8"
CL
CLEAR LENS
LF1330
DECORATIVE CAST ALUMINUM ACORN
GLOBE & FITTER ASSEMBLY
T073LD4NT540K
73W LED TOWER
TYPE "V" DISTRIBUTION
4000K COLOR TEMP
73W LED DRIVER
400mA
(WIRED @ 120-277V)
10-24 THUMBSCREW
(3 REQ. EQ. SP. @ 120°)
1/4-20 S/S SET SCREW
(3 REQD. EQ. SPCD. @ 120°)
RM-C TENON #15
BD4S12 .125
4"Ø X .125" ROUND, STRAIGHT, SMOOTH ALUMINUM SHAFT
12'-0"
TO TOP
OF
SHAFT
ACCESS HOLE
WITH COVER
18"
3 1/2"
ALUMINUM SPUN BASE COVER
CAST ALUMINUM BASE PLATE
GROUND LINE
CONDUIT BY OTHERS
1/2"Ø X 18" GALVANIZED STEEL ANCHOR BOLT
(4 REQ.)
CONCRETE FOOTING DESIGNED &
PROVIDED BY OTHERS
BASE PLATE
Ø8" BOLT CIRCLE
90°"
TYP.
MOUNTING SLOT
FOR 1/2"Ø ANCHOR BOLT
(4 EQUIDISTANDLY SPACED)
45°"
ACCESS HOLE
MOUNTING DETAIL
PROPORTIONAL VIEW