



Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Customer: \_\_\_\_\_

**LED PERFORMANCE**

PLATFORM SPECIFICATION
• Efficacy ranges from 87-116 lumens per watt
• Customized lens precisely directs the light
• Operating temperature of -30C to 55C
• Life: L70 is 60,000 hours
• PLATFORM CCT: 2700K, 3000K,3500K, and 4000K
• TOWER CCT: 4000K
• CRI: >70
• Parallel circuitry ensures consistent light output in the event of single LED failure

PLATFORM DRIVER SPECIFICATION
• Operates at 400mA
• Dimmable down to 10%
• Built in surge protection
• Constant current output 50/60HZ
• Driver Efficiency > 90% power factor above 99%
• 120 – 277 volts
• 0-10V dimming protocol is standard

PLATFORM LISTINGS
• Fully compliant with the RoHS Directive
• Certifications: ETL
• Rated IP65 with an optional IP6 rating

PLATFORM						Type III			Type V		
LED Wattage	CCT	CRI	Typical Luminous Flux	System Wattage	Typical Efficacy	B	U	G	B	U	G
29W	2700K	70	2670	30w	89	-	-	-	-	-	-
	3000K	70	2670	30w	89	-	-	-	-	-	-
	3500K	70	3209	30w	107	-	-	-	-	-	-
	4000K	70	3465	30w	116	1	0	1	2	0	1
46W	2700K	70	4004	46w	87	-	-	-	-	-	-
	3000K	70	4004	46w	87	-	-	-	-	-	-
	3500K	70	4814	46w	105	-	-	-	-	-	-
78W	4000K	70	5197	46w	115	1	0	1	1	0	1
	2700K	70	7041	80w	88	-	-	-	-	-	-
	3000K	70	7041	80w	88	-	-	-	-	-	-
	3500K	70	8464	80w	106	-	-	-	-	-	-
117W	4000K	70	9138	80w	114	3	0	1	2	0	2
	2700K	70	10561	120w	88	-	-	-	-	-	-
	3000K	70	10561	120w	88	-	-	-	-	-	-
	3500K	70	12696	120w	106	-	-	-	-	-	-
117W	4000K	70	13707	120w	114	3	0	2	4	0	2

LIGHT GUIDE SPECIFICATION
• Typical Efficacy is 119 - 135 lumens per watt
• Color temp: 2700K, 3000K, 3500K and 4000K
• CRI: 70
• Distribution: Type II, III, IV & V

LIGHT GUIDE DRIVER SPECIFICATION	
• 120 thru 277 Universal Voltage	• Drive Current: 678mA to 708mA (model dependent)
• 50/60 HZ	• Driver Efficiency > 80%; Power Factor > 0.90
• 0-10V dimming to 10%	• Lifetime: 50,000 hours
• Minimum operating temperature: -30°C	• Integral Surge Protection in conformance to IP64
	• UL, cUL, CE

**LIGHT GUIDE LARGE**

LED Wattage	CCT	CRI	Type II			Type III			Type IV			Type V			Drive Current									
			Delivered Lumens	Lumens Per Watt	B U G	Delivered Lumens	Lumens Per Watt	B U G	Delivered Lumens	Lumens Per Watt	B U G	Delivered Lumens	Lumens Per	B U G	Type II	Type III	Type IV	Type V	Nominal System					
60W	2700K	70	7392	123	3 0 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	535mA	-	-	-	60w
	3000K	70	7352	123	3 0 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	535mA	-	-	-	60w
	3500K	70	7756	129	3 0 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	535mA	-	-	-	60w
	4000K	70	7872	131	3 0 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	535mA	-	-	-	60w
75W	2700K	70	9310	123	3 0 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	678mA	-	-	-	75w
	3000K	70	9259	123	3 0 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	678mA	-	-	-	75w
	3500K	70	9769	129	3 0 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	678mA	-	-	-	75w
	4000K	70	9915	131	3 0 3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	678mA	-	-	-	75w
80W	2700K	70	-	-	-	-	9978	125	3 0 3	10114	126	3 0 3	9546	119	3 0 2	-	-	-	-	555mA	555mA	555mA	80w	
	3000K	70	-	-	-	-	9924	124	3 0 3	10059	126	3 0 3	9494	119	3 0 2	-	-	-	-	555mA	555mA	555mA	80w	
	3500K	70	-	-	-	-	10470	131	3 0 3	10613	133	3 0 3	10017	125	3 0 2	-	-	-	-	555mA	555mA	555mA	80w	
	4000K	70	-	-	-	-	10627	133	3 0 3	10772	135	3 0 3	10167	127	3 0 2	-	-	-	-	555mA	555mA	555mA	80w	
90W	2700K	70	-	-	-	-	11225	125	3 0 3	11378	126	3 0 3	10739	119	4 0 2	-	-	-	-	625mA	625mA	625mA	90w	
	3000K	70	-	-	-	-	11165	124	3 0 3	11317	126	3 0 3	10681	119	4 0 2	-	-	-	-	625mA	625mA	625mA	90w	
	3500K	70	-	-	-	-	11779	131	3 0 3	11939	133	3 0 3	11269	125	4 0 2	-	-	-	-	625mA	625mA	625mA	90w	
	4000K	70	-	-	-	-	11955	133	3 0 3	12118	135	3 0 3	11437	127	4 0 2	-	-	-	-	625mA	625mA	625mA	90w	
105W	2700K	70	-	-	-	-	12887	125	3 0 3	13251	126	3 0 3	12417	119	4 0 2	-	-	-	-	708mA	708mA	708mA	105w	
	3000K	70	-	-	-	-	12817	124	3 0 3	13179	126	3 0 3	12350	119	4 0 2	-	-	-	-	708mA	708mA	708mA	105w	
	3500K	70	-	-	-	-	13522	131	3 0 3	13904	133	3 0 3	13029	125	4 0 2	-	-	-	-	708mA	708mA	708mA	105w	
	4000K	70	-	-	-	-	13725	133	3 0 3	14112	135	3 0 3	13224	127	4 0 2	-	-	-	-	708mA	708mA	708mA	105w	

Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Customer: \_\_\_\_\_

HIGH-LOW MOTION SENSOR
• 0-10v configurable output set to 10%, 25% or 50% dimming
• Adjustable time delay
• 45° Detection
• Mounts Integral to fixture
• Lens available in white only
• Satisfies California Title 24

SURGE SUPPRESSION
• A Surge Protection Device (SPD) is standard featuring a 20kA maximum discharge current 8/20µs Waveform (Imax); 10kA nominal discharge current 8/20µs Waveform (In) and thermally protected varistor technology.
• Meets IEEE C62.41.2 Location Category C High and US Dept of Energy MSSLC Model Spec.
• SPD shall be wired in series and will result in an open circuit during a fault state, resulting in the luminaire to turn off to protect system components thereby indicating SPD module replacement.

WARRANTY
See <a href="http://www.ANPlighting.com">www.ANPlighting.com</a> for complete fixture warranty.
LED warranty information
• 7 year limited warranty* on Platform LED engines
• 5 year limited warranty* on Light Guide engines
• 5 year limited warranty* on LED Drivers
*Limited Warranty: A typical year is defined as 4380 hours of operation. Failed defined as more than 10% of the total platform LED's not operating.

**ACCESSORIES**



Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Customer: \_\_\_\_\_

**POST MOUNTS** | See Post Arm Section on Website for Specification Sheets and additional post arms.




**COLUMN MOUNT**



**CM** 5 3/4" SQ x 3 1/2" H

**WALL MOUNTS** | See Wall Mount Section on Website for Specification Sheets and additional wall mount arms.

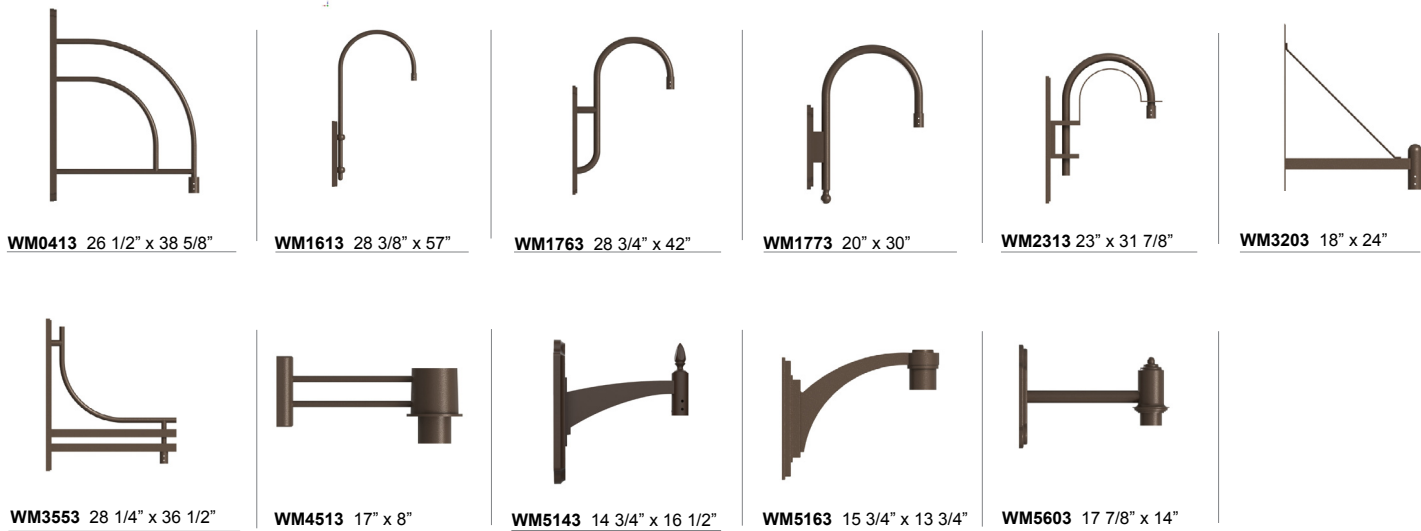

03/12/21