


Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

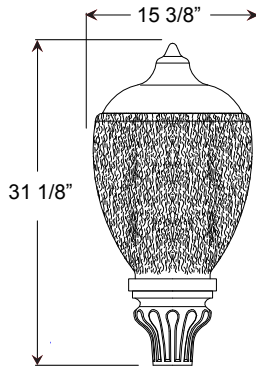

**Specifications**

**Fitter:**  
Fitter is durable 356 cast aluminum.  
All hardware provided shall be stainless steel or zinc plated steel.

**Acorn Globe:**  
Acorn Globes available in clear stipple or white stipple with decorative spun aluminum top.

**Fixture Mounting:**  
Post Mount: Post Cap with set screws.  
Fits 3" and 4" poles.

**Drivers:**  
Universal voltage 120-277 is standard. 0-10V dimming is standard for LED platforms.

See page 2 table for LED engine and driver specs, voltage and dimming protocols



**Electrical:**  
Approximately 12" of pull wire extends from luminaire. Additional pull wire provided for post mount arms and wall mounts.

**Finish:**  
A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

**Modifications:**  
Consult factory for custom or modified designs.

**LF0544**

**Weight:** 19.5 lbs  
**EPA:** 1.71

**Catalog Logic**

**LF0544** | **12** | **CL** | **P046LD4D** | **T5** | **40K** | **PC** | **FIN02** | **WM2141** | **72**

Luminaire Series | Cage | Lens | Light Source & Wattage | Optic | CCT | Accessories | Finial | Mounting | Finish

Catalog Number	1	2	3	4	5	6	7	8	9
<b>LF0544</b>									

**1 OPTIONAL CAGES**  
See Page 3 for Style/Design

11, 12, 13, 14, 15
21, 22, 23, 24, 25
31, 32, 33, 34, 35
41, 42, 43, 44, 45

**2 LENS**

<b>CL</b> (Clear Stipple Polycarbonate)
<b>WH</b> (White Stipple Polycarbonate)

**3 LIGHT SOURCE & WATTAGES**

<b>P029LD4D</b> (29w Platform; 400ma Driver)
<b>P046LD4D</b> (46w Platform; 400ma Driver)

**4 OPTICS**

<b>T2</b> (Type II)
<b>T3</b> (Type III)
<b>T5</b> (Type V)

**5 COLOR TEMPERATURE (CCT)**

<b>27K</b> (2700K)
<b>30K</b> (3000K)
<b>35K</b> (3500K)
<b>40K</b> (4000K)

**6 ACCESSORIES**

<b>HSS90</b> (90° House Side Shield, polished)
<b>HSS120</b> (120° House Side Shield, polished)
<b>PHSS90</b> (90° House Side/Uplight Shield, polished)
<b>PHSS120</b> (120° House Side/Uplight Shield, polished)
<b>*EMG-LED20HV</b> (20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms, 78w or less)
<b>HLMSPC-06</b> (High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height)
<b>HLMSPC-10</b> (High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height)
<b>PC</b> (Button Photo Cell)
<b>RNR</b> (Reinforcing Neck Ring)
<b>SP</b> (Surge Protector, 10kA & 10kV)
<b>TLPC</b> (Twist Lock photo cell, includes receptacle & photo cell)
<b>TL5</b> (5-pin Twist Lock receptacle)
<b>TL7</b> (7-pin Twist Lock receptacle)

**\*For Emergency lumen output data, see Resources section at [www.ANPlighting.com](http://www.ANPlighting.com).**

**7 OPTIONAL FINIALS**  
See Page 3 for Style/Size

<b>FIN02, FIN04, FIN05, FIN06, FIN10, FIN12, FIN15,</b>
<b>FIN18, FIN28, FIN39, FIN41, FIN42, FIN48, FIN64,</b>
<b>FIN70</b>

**8 MOUNTING SOURCE**

Post Mount Arms *See Page 4 for Style/Size		Wall Mount Arms *See Page 4 for Style/Size	
<b>PA5151</b>	<b>PA8711</b>	<b>WM2141</b>	<b>WM8581</b>
<b>PA5171</b>	<b>PA8831</b>	<b>WM2211</b>	<b>WM8831</b>
<b>PA5411</b>		<b>WM3351</b>	
<b>PA5621</b>		<b>WM4511</b>	
<b>PA5651</b>		<b>WM5131</b>	
<b>PA6211</b>		<b>WM5161</b>	
<b>PA7911</b>		<b>WM5311</b>	
<b>PA8031</b>		<b>WM5601</b>	
<b>PA8521</b>		<b>WM7411</b>	
<b>PA8571</b>		<b>WM8011</b>	
<b>Column Mount</b> *See Page 4 for Style/Size			
<b>CM</b>	Column Mount		

**9 FINISHES**  
\*Premium and Marine Grade Finish have additional charges

Standard Colors	Standard Grade	Marine Grade*	Standard Colors	Standard Grade	Marine Grade*
Aspen Green	10	10M	Architectural Bronze	51	51M
Cantaloupe	11	11M	Patina Verde	52	52M
Lilac	12	12M	Copper Clay	53	53M
Putty	13	13M	Silver	56	56M
Raw Unfinished	40	NA	Black Verde	61	61M
Black	41	41M	Painted Chrome	70	70M
Forest Green	42	42M	Painted Copper	71	71M
Bright Red	43	43M	Textured Black	72	72M
White	44	44M	Matte Black	73	73M
Bright Blue	45	45M	Textured Architectural Bronze	76	76M
Sunny Yellow	46	46M	Textured White	77	77M
Aqua Green	47	47M	Textured Silver	78	78M
Galvanized	49	NA	<b>PREMIUM FINISH</b>	<b>Premium Grade*</b>	<b>Marine Grade*</b>
Navy	50	50M	Carbon Graphite	96	96M

Consult Factory for additional paint charges and availability.

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

**LED PERFORMANCE**

**PLATFORM**

LED Wattage	CCT	Typical Luminous Flux	System Wattage	Typical Efficacy
29W	2700K	2670	30w	89
	3000K	2670	30w	89
	3500K	3209	30w	107
	4000K	3465	30w	116
46W	2700K	4004	46w	87
	3000K	4004	46w	87
	3500K	4814	46w	105
	4000K	5197	46w	115

**PLATFORM SPECIFICATION:**

- Efficacy ranges from 87-116 lumens per watt
- Customized lens precisely directs the light
- Operating temperature of -30C to 55C
- Life: L70 is 60,000 hours
- PLATFORM CCT: 2700K, 3000K, 3500K, and 4000K
- CRI: >70
- Parallel circuitry ensures consistent light output in the event of single LED failure

**PLATFORM LISTINGS**

- Fully compliant with the RoHS Directive
- Certifications: ETL
- Rated IP65 with an optional IP66 rating

**PLATFORM DRIVER SPECIFICATION:**

- Operates at 400mA
- Dimmable down to 10%
- Built in surge protection
- Constant current output 50/60HZ
- Driver Efficiency > 90% power factor above 99%
- 120 – 277 volts
- 0-10V dimming protocol is standard

**WARRANTY**

See [www.ANPlighting.com](http://www.ANPlighting.com) for complete fixture warranty.

- 7 year limited warranty\* on Platform LED engines
- 5 year limited warranty\* on Platform Drivers

\*Limited Warranty: A typical year is defined as 4380 hours of operation. Failure defined as more than 10% of the total platform LED's not operating

**ACCESSORIES**



HSS90 & HSS120



PHSS90 & PHSS120



EMG-LED 20HV



HLMSPC-06 & HLMSPC-10



PC



RNR



TLPC



TL5 & TL7

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

Customer: \_\_\_\_\_

**CAGES**



CAGE 11



CAGE 12



CAGE 13



CAGE 14



CAGE 15



CAGE 21



CAGE 22



CAGE 23



CAGE 24



CAGE 25



CAGE 31



CAGE 32



CAGE 33



CAGE 34



CAGE 35



CAGE 41



CAGE 42



CAGE 43




CAGE 44




CAGE 45


**FINIALS**




FIN02




FIN04




FIN05




FIN06




FIN10




FIN12




FIN15




FIN18




FIN28




FIN39




FIN41




FIN42



FIN48



FIN64




FIN70

Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Customer: \_\_\_\_\_

**POST MOUNTS** - See Post Arm Section on Website for Specification Sheets and additional post arms.  
 Dimensions are Projection x Height

**COLUMN MOUNT**

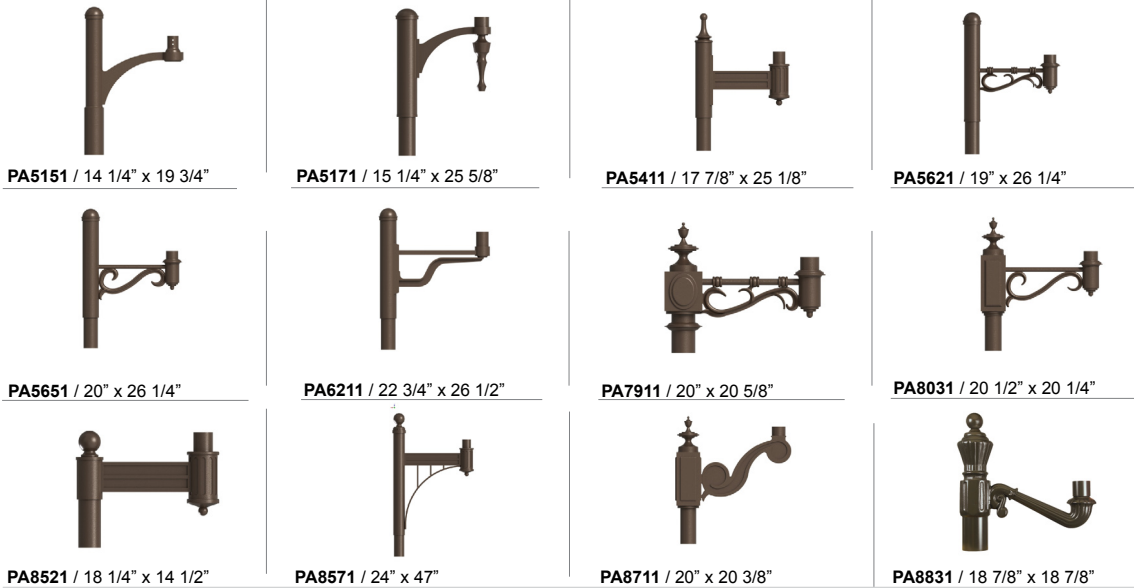

**WALL MOUNTS** - See Wall Mount Section on Website for Specification Sheets and additional wall mount arms.  
 Dimensions are Projection x Height.

