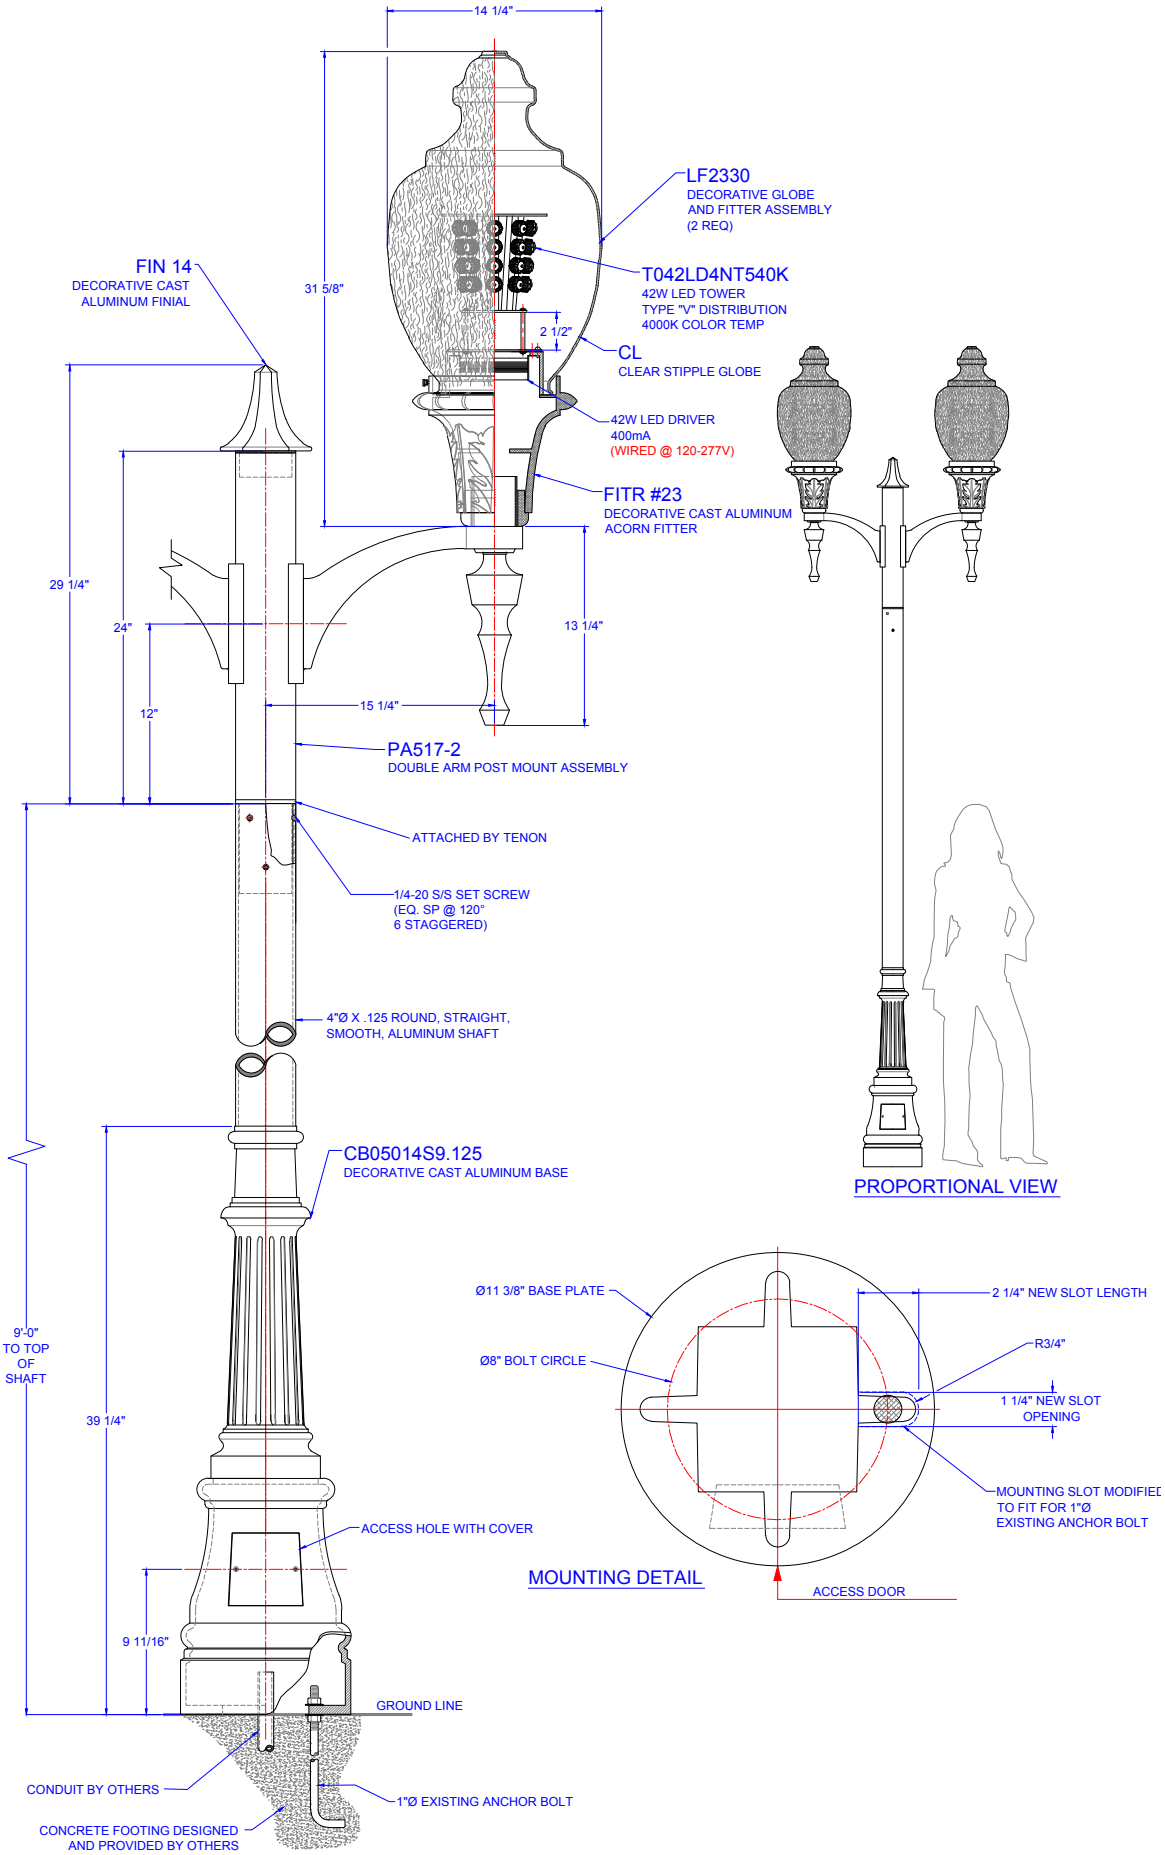
14 1/4"
31 5/8"
LF2330
DECORATIVE GLOBE
AND FITTER ASSEMBLY
(2 REQ)
T042LD4NT540K
42W LED TOWER
TYPE "V" DISTRIBUTION
4000K COLOR TEMP
2 1/2"
CL
CLEAR STIPPLE GLOBE
42W LED DRIVER
400mA
(WIRED @ 120-277V)
FITR #23
DECORATIVE CAST ALUMINUM
ACORN FITTER
FIN 14
DECORATIVE CAST
ALUMINUM FINIAL
29 1/4"
24"
12"
13 1/4"
15 1/4"
PA517-2
DOUBLE ARM POST MOUNT ASSEMBLY
ATTACHED BY TENON
1/4-20 S/S SET SCREW
(EQ. SP @ 120°
6 STAGGERED)
4"Ø X .125 ROUND, STRAIGHT,
SMOOTH, ALUMINUM SHAFT
CB05014S9.125
DECORATIVE CAST ALUMINUM BASE
9'-0"
TO TOP
OF
SHAFT
39 1/4"
ACCESS HOLE WITH COVER
9 11/16"
GROUND LINE
CONDUIT BY OTHERS
1"Ø EXISTING ANCHOR BOLT
CONCRETE FOOTING DESIGNED
AND PROVIDED BY OTHERS
PROPORTIONAL VIEW
Ø11 3/8" BASE PLATE
Ø8" BOLT CIRCLE
2 1/4" NEW SLOT LENGTH
R3/4"
1 1/4" NEW SLOT
OPENING
MOUNTING SLOT MODIFIED
TO FIT FOR 1"Ø
EXISTING ANCHOR BOLT
ACCESS DOOR
MOUNTING DETAIL