


Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Customer: \_\_\_\_\_



**Specifications**

**Material:**  
 All parts are durable 356 cast aluminum and high strength aluminum.  
 All hardware provided shall be stainless steel or zinc plated steel.

**Fixture Mounting:**  
 Post Mount: Post Cap with set screws.  
 Fits 3" and 4" poles.

**Drivers:**  
 Universal voltage 120-277 is standard.  
 0-10V dimming is standard for LED platforms and 0-10V, TRIAC and ELV dimming to 1% protocols are standard for LED modules.

See page 2 table for LED engine and driver specs, voltage and dimming protocols.



**Electrical:**  
 Approximately 12" of pull wire extends from luminaire. Additional pull wire provided for post mount arms and wall mounts.

**Finish:**  
 A polyester powder coat high quality finish is electro-statically applied and baked at 430° for exceptional durability and color retention. Products undergo an intensive five-step cleansing and pretreatment process for maximum paint adhesion.

Marine grade finish provides superior salt, humidity and UV protection. This coating withstands up to 3000 hours of continuous salt spray, comes with a 5-year warranty and is available in either a textured or gloss surface.

**Modifications:**  
 Consult factory for custom or modified designs.

**LA783 LED**

**Weight:** 51.5 lbs  
**EPA:** 1.4  
**BUG:** \*See Table Below

**Catalog Logic**

LA783 | 1 | P046LD4 | D | T5 | 40K - PC - PA6211 - 72

Luminaire Series | Pendant or Post Mount | Light Source & Wattage | Dimming | Optics | CCT | Accessories | Mounting Source | Finish

Catalog Number	1	2	3	4	5	6	7	8
	LA783	1	D					

**1 FIXTURE ORIENTATION**

1 Post
--------

**2 LIGHT SOURCE & WATTAGES**

P029LD4	(29w Platform; 400ma Driver)
P046LD4	(46w Platform; 400ma Driver)
P078LD4	(78w Platform; 400ma Driver)
P117LD4	(117w Platform; 400ma Driver)
M016LD	(16w, 2000 lumen, Cree module)
M024LD	(24w, 3000 lumen, Cree module)
M037LD	(37w, 4000 lumen, Cree module)

**3 DIMMING**

D (Dimming)
-------------

See page 2 table for LED engine and driver specs, voltage and dimming protocols.

**4 OPTICS**

Platform	Module
T2 (Type II)	W (T5 Wide Distribution with Dome LED Lens)
T3 (Type III)	N (T5 Narrow Distribution with Flat LED Lens)
T5 (Type V)	

**\*BUG RATING TABLE**

B3-U3-G3	P117LD4NT340K
B4-U3-G3	P117LD4NT540K

**5 COLOR TEMPERATURE (CCT)**

Platform	Module
27K (2700K)	27K (2700K)
30K (3000K)	30K (3000K)
35K (3500K)	35K (3500K)
40K (4000K)	40K (4000K)

**6 ACCESSORIES**

HSS90	(90° House Side Shield, polished)
HSS120	(120° House Side Shield, polished)
*EMG-LED5	(5w, LED Emergency Driver, remote placement, Cree module only)
*EMG-LED7	(7w, LED Emergency Driver, remote placement, Cree module only)
*EMG-LED10	(10w, LED Emergency Driver, remote placement, Cree module only)
*EMG-LED20HV	(20w, High Voltage LED Emergency Driver, remote placement, for use with Platforms and Towers, 78w or less)
HLMSPC-06	(High-Low Motion Sensor/Photocell; 15' - 30' Sensor Mounting Height)
HLMSPC-10	(High-Low Motion Sensor/Photocell; 8' - 15' Sensor Mounting Height)
PC	(Button Photo Cell)
SP	(Surge Protector, 10kA & 10kV)
TLPC	(Twist Lock photo cell & receptacle)
TL	(Twist Lock receptacle only)
TL5	(5-pin Twist Lock receptacle only)
TL7	(7-pin Twist Lock receptacle only)

\*For Emergency lumen output data, see Resources section at [www.ANPlighting.com](http://www.ANPlighting.com).

**7 MOUNTING SOURCE**

Post Mount Arms *See Page 3 for Style/Size		Wall Mount Arms *See Page 3 for Style/Size	
PA3111	PA8521	WM2141	WM8581
PA3321	PA8571	WM2211	WM8831
PA5151		WM2221	
PA5171		WM4511	
PA5411		WM5131	
PA6111		WM5161	
PA6211		WM5601	
PA7711		WM6111	
PA7911		WM7411	
PA8031		WM7421	
Column Mount *See Page 3 for Style/Size			
CM	Column Mount		

**8 FINISHES**

Standard Grade	Marine Grade	Standard Grade	Marine Grade
40	NA	Raw Unfinished	53
41	101	Black	56
42	102	Forest Green	61
43	114	Bright Red	70
44	107	White	71
45	112	Bright Blue	72
46	123	Sunny Yellow	73
47	120	Aqua Green	76
49	NA	Galvanized	77
50	111	Navy	78
51	103	Architectural Bronze	10
52	104	Patina Verde	11
12	133	Lilac	13
100	106	Black Verde	106
101	118	Painted Chrome	118
102	105	Painted Copper	105
103	108	Textured Black	108
104	125	Matte Black	125
105	121	Textured Architectural Bronze	121
106	127	Textured White	127
107	124	Textured Silver	124
108	130	Aspen Green	130
109	131	Cantaloupe	131
110	132	Putty	132

Consult factory for additional paint charges and availability

Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Customer: \_\_\_\_\_

**LED PERFORMANCE**

MODULE					PLATFORM				
LED Wattage	CCT	Typical Luminous Flux	System Wattage	Typical Efficacy	LED Wattage	CCT	Typical Luminous Flux	System Wattage	Typical Efficacy
16W	2700K	2000	19W	125	29W	2700K	2670	30w	89
	3000K	2000	19W	125		3000K	2670	30w	89
	3500K	2000	19W	125		3500K	3209	30w	107
	4000K	2000	19W	125		4000K	3465	30w	116
2700K	3000	28W	125	46W		2700K	4004	46w	87
3000K	3000	28W	125		3000K	4004	46w	87	
3500K	3000	28W	125		3500K	4814	46w	105	
4000K	3000	28W	125		4000K	5197	46w	115	
24W	2700K	4000	43W	108	78W	2700K	7041	80w	88
	3000K	4000	43W	108		3000K	7041	80w	88
	3500K	4000	43W	108		3500K	8464	80w	106
	4000K	4000	43W	108		4000K	9138	80w	114
37W	2700K	10561	120w	88	117W	2700K	10561	120w	88
	3000K	10561	120w	88		3000K	12696	120w	106
	3500K	12696	120w	106		3500K	13707	120w	114
	4000K	13707	120w	114		4000K			

**MODULE SPECIFICATION**

- Efficacy 65-125 lumens per watt
- Life: L70 50,000 hours
- Color temp: 2700K,3000K,3500K and 4000K
- CRI: >90

**MODULE DRIVER SPECIFICATION**

- Input Voltage: 120-277 Volts; 50/60Hz
- Dimmable down to 1%
- 0-10V, TRIAC and ELV dimming protocols are standard.
- Output Current: Constant Current: 440mA to 940mA (model dependent)
- Driver Efficiency > 80%; Power Factor > 0.9
- Integral Surge Protection in conformance to ANSI C62.41 Category A

**MODULE LISTINGS**

- Fully compliant with the RoHS Directive
- Certifications: CE/UL

**PLATFORM SPECIFICATION:**

- Efficacy ranges from 80-116 lumens per watt
- Customized lens precisely directs the light
- Operating temperature of -30C to 55C
- Life: L70 is 60,000 hours
- PLATFORM CCT: 2700K, 3000K,3500K, and 4000K
- TOWER CCT: 4000K
- CRI: >70
- Parallel circuitry ensures consistent light output in the event of single LED failure

**PLATFORM DRIVER SPECIFICATION:**

- Operates at 400mA
- Dimmable down to 10%
- Built in surge protection
- Constant current output 50/60HZ
- Driver Efficiency > 90% power factor above 99%
- 120 – 277 volts
- 0-10V dimming protocol is standard

**PLATFORM LISTINGS**

- Fully compliant with the RoHS Directive
- Certifications: ETL
- Rated IP65 with an optional IP66 rating

**WARRANTY**

See [www.ANPlighting.com](http://www.ANPlighting.com) for complete fixture warranty.


- 5 year limited warranty on Modules/Drivers
- 7 year limited warranty\* on Platform LED engines
- 5 year limited warranty\* on Platform Drivers

\*Limited Warranty: A typical year is defined as 4380 hours of operation. Failure defined as more than 10% of the total platform LED's not operating.

Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Customer: \_\_\_\_\_


**POST MOUNTS** - See Post Arm Section on Website for Specification Sheets and additional post arms.  
 Dimensions are Projection x Height

**COLUMN MOUNT**

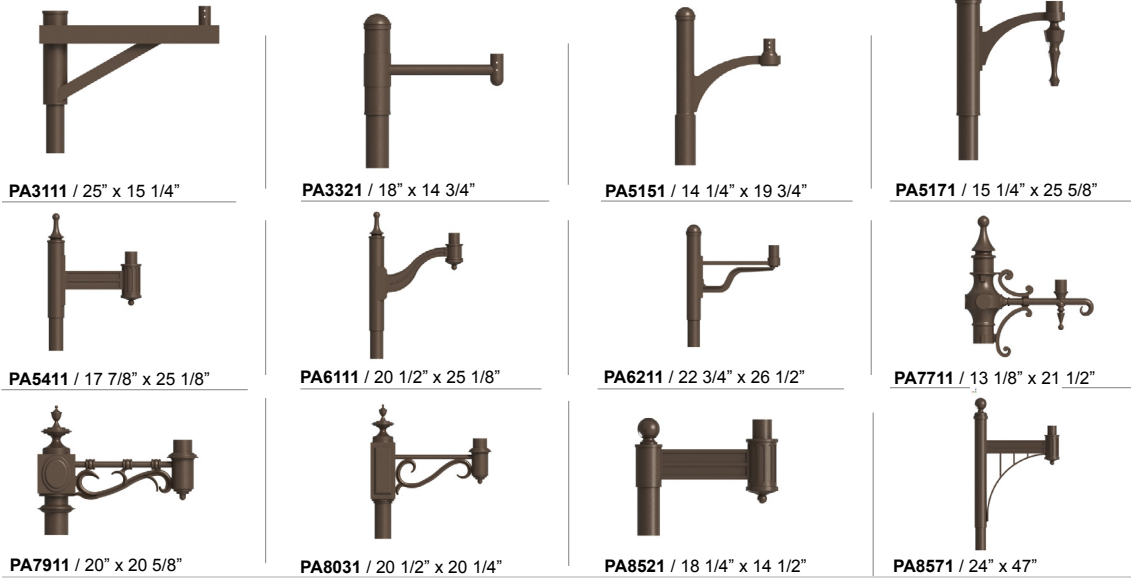

**CM** / 5 3/4" SQ x 3 1/2" H

**WALL MOUNTS** - See Wall Mount Section on Website for Specification Sheets and additional wall mount arms.  
 Dimensions are Projection x Height.

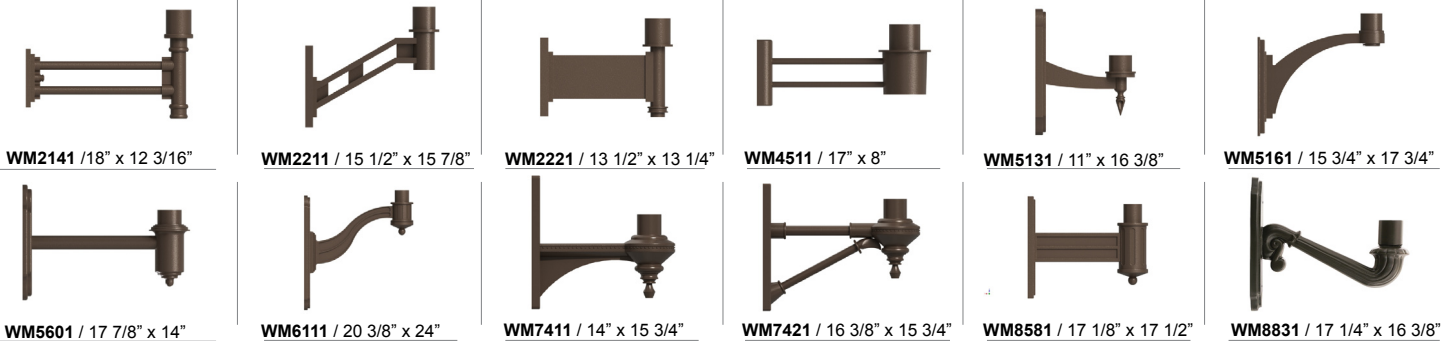

**ACCESSORIES**

